

Poly-crystalline

STP6-XXX/60 Series

260W/265W/270W/275W/280W

12
Years

Guarantee on product material and workmanship

25
Years

Linear power output warranty




High conversion efficiency
High module efficiency to guarantee power output.



Easy Installation and Handling
For various applications



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.




Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.



0 ~ +5W positive tolerance
Detailed information in Electrical Specifications



Durability against extreme environmental
High salt mist and ammonia resistance certified by TUV NORD

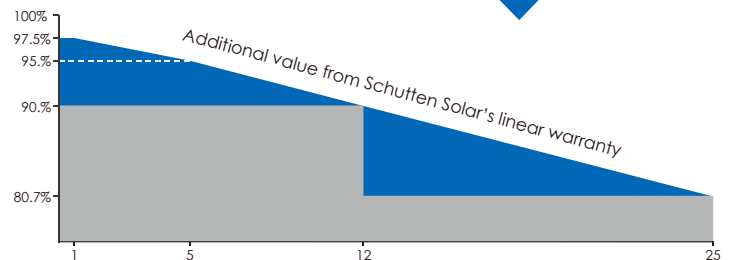

Anhui Schutten Solar Energy CO.,Ltd. known as " Schutten Solar ", is one of the world's leading solar panel manufacturers. Our Slogan is " Blue Sky · Green Life ". Deploying more than 2GW solar panels worldwide.



Tel : +86 25-86816810
Email : info@schutten-solar.com
Web : www.schutten-solar.com

© Anhui Schutten Solar Energy Co.,Ltd.
STP6-XXX/60 Series_rev2018.8



Electrical Characteristics

Module Type	STP6-260/60	STP6-265/60	STP6-270/60	STP6-275/60	STP6-280/60
Maximum Power (Pmax)	260Wp	265Wp	270Wp	275Wp	280Wp
Maximum Power Voltage (Vmp)	31.10V	31.40V	31.70V	32.00V	32.30V
Maximum Power Current (Imp)	8.37A	8.44A	8.52	8.61	8.69A
Open-circuit Voltage (Voc)	38.10V	38.60V	38.80V	39.10V	39.40V
Short-circuit Current (Isc)	8.98A	9.03A	9.09A	9.15A	9.20A
Module Efficiency STC (%)	15.88%	16.19%	16.50%	16.80%	17.11%
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W

STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

Mechanical Characteristics

Cell Type	Poly-crystalline 156.75×156.75mm (6 inch)
No. of cells	60 (6×10)
Dimensions	1640×992×35mm (64.56×39.05×1.37 inch)
Weight	18.0 kg (39.68 lbs.)
Front Glass	3.2mm, High Transmission, Low Iron, ARC Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	4.0mm, Length: 900mm
Connector	MC4 Compatible
Hailstone Impact Test	80Km/h for 25mm ice ball

Thermal Characteristics

Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
Temperature Coefficients of Pmax	-0.40% / °C
Temperature Coefficients of Voc	-0.31% / °C
Temperature Coefficients of Isc	+0.06% / °C


Packaging Configuration

Container	20'GP	40'HQ	Operating Temperature	-40°C~+85°C
Pieces Per Pallet	29 / 25 / 19	29 / 5	Maximum System Voltage	1000VDC (IEC)
Pallets Per Container	6 / 6 / 1	28 / 14	Maximum System Voltage	1500VDC (IEC)
Pieces Per Container	343	882	Maximum Series Fuse Rating	15A

Maximum Ratings



Engineering Drawings

*All dimensions in mm(inch)

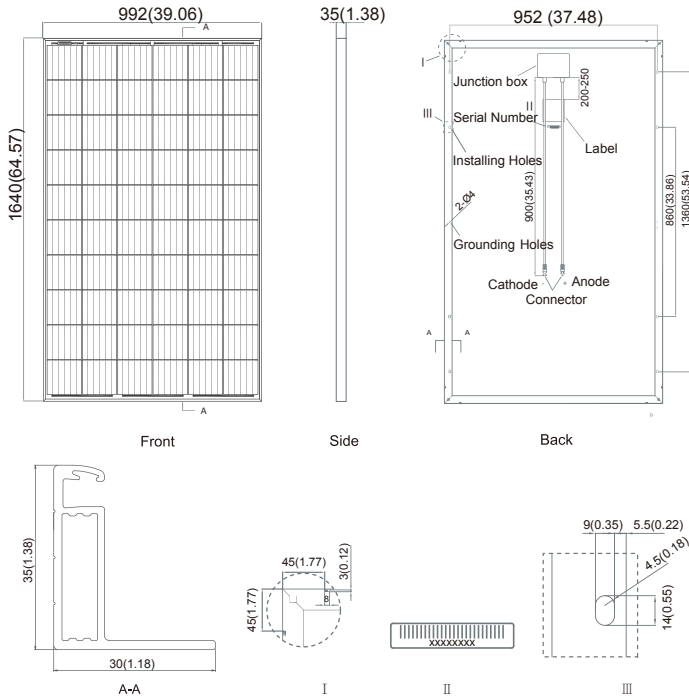

I-V Curves

Current-Voltage & Power-Voltage Curves (270W)

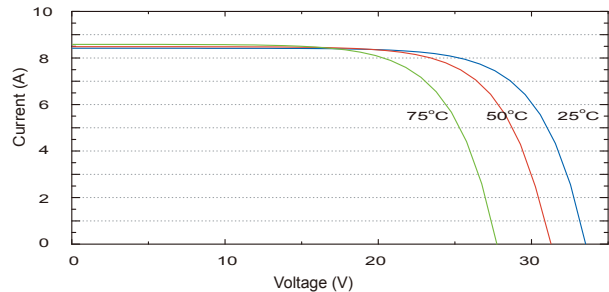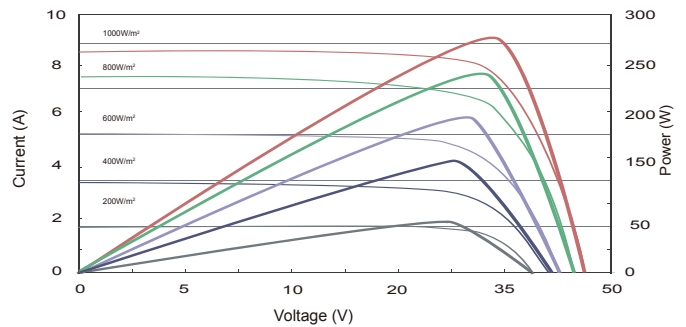

Warning :
Read the installation and user manual in its entirety before handling, installing, and operating Schutten solar modules.

Schutten Partners :