

Deep Cycle AGM

D.C AGM Series

GENERAL INFORMATION

UNIBAT Deep Cycle AGM series is designed for repeated Deep Cycle use, to be discharged and recharged hundreds of times. The consistency performance of group usage (groups with multiple connections) is much better than of other general series, making D.C AGM ideal for heavy duty applications.

It is made with updated AGM VRLA technology from pure materials with excellent know how to meet all needs, providing excellent cyclic and recovery performance after over-discharging.

UNIBAT Deep Cycle AGM differs from conventional VRLA batteries, as it contains more lead, heavier plates and other special materials that enable to deliver more power and capacity over many charging cycles. The use of a special plate curing process for 10 days and extra superior pasting to the grids, ensuring long service life and fast recovery from deep discharge.

Positive plate: The positive plates are composed of a grid frame of heavy duty lead - tin - calcium alloy and active material of porous lead dioxide.
Negative plate: The negative plates are composed of a grid frame of lead - tin - calcium alloy as well and with active material of spongy lead.

Separator: The separators made of non - woven fabric of fine glass fibers are chemically stable in the electrolyte sulfuric acid. The high porousness fully absorbs the electrolyte and prevents shorting between positive and negative plates.

Terminal structure: The electrode terminals are protected by a structure which secures long adhesive - embedded paths and by the use of strong epoxy material.

Casing: The unique construction and sealing techniques of **UNIBAT Deep Cycle AGM** series guarantee leak proof operation in any position with no adverse effect to capacity or service life. The battery case is made from ABS or enhanced PP material and is shock resistant.

UNIBAT Deep Cycle AGM batteries are designed for a long service life in cyclic applications, up to 1200 cycles for 50% Depth Of Discharge, or more than 10 years lifetime in float charge operation.

APPLICATIONS

- Off-Grid solar systems
- Marine signaling/service applications
- UPS systems - Road lights
- RV service applications
- Wheelchairs – scooters – Lawn mowers
- Electrical powered tools
- Communication & Emergency back-up systems

DESIGN FEATURES & BENEFITS

- Sealed construction/Maintenance Free : No need for checking, saving of manpower & hundreds of liters of demineralized water for regular topping up or cleaning of corroded terminals throughout its lifetime. No leakage of electrolyte from terminal or casing. No damage of flooring by spillage of battery acid or water during maintenance. No need of separate battery room.
- Free from Orientation Constraints : The sealed construction allows battery to be installed in any position, horizontal, vertical, sideways - without any effect on its performance. Can be installed by stacking together in any convenient orientation or position, thereby saving huge floor space as

Deep Cycle AGM

D.C AGM Series

compared to conventional batteries. Batteries can be installed indoors - no need for separate battery rooms, costly acid proof flooring etc. Battery can be installed in a cabinet too.

- Eco Friendly : The unique gas recombination technology effectively nullifies generation of gas during normal use. It is totally eco-friendly, ensuring clean and safe environment. No need for elaborate air exhaust systems as in conventional battery installations.
- Minimal Voltage Drop : Since battery emits no gases or fumes, it can be placed next to the inverter or UPS system ensuring minimal voltage drop & transmission losses between battery and equipment, higher efficiency, lower power consumption and cost of cabling.
- Easy Handling - Easy Installation : Lightweight and compact. Modular construction, easy to install, connect and commission. Does not require specially trained technical manpower for elaborate installation and commissioning procedures.
- Ready To Use : Available in fully (factory) charged condition. Instant power source.
- Excellent Service Life: More than 10 years lifetime for float applications, 1200 charge/discharge cycles for cyclic use at 25°C.
- Low Self Discharge : Can be stored for 3 to 6 months, depending on ambient temperature before recharge and without any loss of efficiency or performance. Lower consumption of electricity during use.
- Charge Retention & Recovery : Excellent charge retention and recovery ability due to special design of plates and separators with an absolutely balanced electrolyte. Greatly improved ability to recover from deep discharge (5 hours) from 70% Depth of Discharge.
- Superior High Rate Discharge : Very low internal resistance and very high electrolyte - active material reactive interface - allows very high currents for short and medium duration. Requires smaller capacity (as compared to flooded batteries) for high rate discharges up to 15 mins/30 mins/ 60 mins duration.
- High Reliability : Tough construction and heavy duty design with superior corrosion resistant lead calcium tin alloy. Lower size, lower cost, lower space requirement. Can deliver the rated performance throughout its service life.

RANGE SUMMARY

UNIBAT D.C AGM SPECIFICATION TABLE												
BATTERY TYPE	V	CAPACITY @ 25°C (AH)		DIMENSIONS (mm)			WEIGHT (kg)	CONTAINER MATERIAL	LAYOUT	TERMINAL	INTERNAL RESISTANCE (mΩ)	MAX DISCHARGE CURRENT (A)
		C20 @ 1,80 Vpc	C100 @ 1,85 Vpc	L	W	H						
17 - 12	12	17	20,4	181	76	167	5,2	ABS	F1	M5	15	225
26 - 12	12	26	31,2	178	124	179	9,9	ABS	F2	M5	10	390
42 - 12	12	42	50,4	200	165	170	14,8	PP	F3	M5	8	420
65 - 12	12	65	78,0	350	166	174	21,6	PP	F4	M6	6	500
75 - 12	12	75	90,0	391	166	174	24,7	PP	F4	M6	6	560
100 - 12	12	100	120,0	407	173	235	33,0	PP	F4	M8	6	600
120 - 12	12	120	144,0	452	172	239	39,7	PP	F5	M8	6	720
150 - 12	12	150	180,0	557	172	240	49,0	PP	F5	M8	5	900
200 - 12	12	200	240,0	533	250	240	63,0	PP	F6	M8	5	1200

Deep Cycle AGM

D.C AGM Series

DISCHARGE PERFORMANCE

D.C AGM SERIES CONSTANT DISCHARGE CURRENT TABLE @ 25 °C											
End Vpc	Type	DISCHARGE TIME (mins) - DISCHARGE CURRENT (A)									
		10	15	30	60	120	180	240	300	600	1200
1,80	D.C AGM 17-12	34,00	28,05	18,70	10,88	6,12	4,59	3,57	2,89	1,53	0,85
	D.C AGM 26-12	52,00	42,90	28,60	16,64	9,36	7,02	5,46	4,42	2,34	1,30
	D.C AGM 42-12	84,00	69,30	46,20	26,88	15,12	11,34	8,82	7,14	3,78	2,10
	D.C AGM 65-12	130,00	107,25	71,50	41,60	23,40	17,55	13,65	11,05	5,85	3,25
	D.C AGM 75-12	150,00	123,75	82,50	48,00	27,00	20,25	15,75	12,75	6,75	3,75
	D.C AGM 100-12	200,00	165,00	110,00	64,00	36,00	27,00	21,00	17,00	9,00	5,00
	D.C AGM 120-12	240,00	198,00	132,00	76,80	43,20	32,40	25,20	20,40	10,80	6,00
	D.C AGM 150-12	300,00	247,50	165,00	96,00	54,00	40,50	31,50	25,50	13,50	7,50
1,70	D.C AGM 17-12	39,10	30,60	19,55	11,39	6,80	4,93	3,91	3,23	1,84	1,02
	D.C AGM 26-12	59,80	46,80	29,90	17,42	10,40	7,54	5,98	4,94	2,81	1,56
	D.C AGM 42-12	96,60	75,60	48,30	28,14	16,80	12,18	9,66	7,98	4,54	2,52
	D.C AGM 65-12	149,50	117,00	74,75	43,55	26,00	18,85	14,95	12,35	7,02	3,90
	D.C AGM 75-12	172,50	135,00	86,25	50,25	30,00	21,75	17,25	14,25	8,10	4,50
	D.C AGM 100-12	230,00	180,00	115,00	67,00	40,00	29,00	23,00	19,00	10,80	6,00
	D.C AGM 120-12	276,00	216,00	138,00	80,40	48,00	34,80	27,60	22,80	12,96	7,20
	D.C AGM 150-12	345,00	270,00	172,50	100,50	60,00	43,50	34,50	28,50	16,20	9,00
1,65	D.C AGM 17-12	39,95	31,45	20,40	11,73	6,97	5,10	4,08	3,40	1,87	1,02
	D.C AGM 26-12	61,10	48,10	31,20	17,94	10,66	7,80	6,24	5,20	2,86	1,56
	D.C AGM 42-12	98,70	77,70	50,40	28,98	17,22	12,60	10,08	8,40	4,62	2,52
	D.C AGM 65-12	152,75	120,25	78,00	44,85	26,65	19,50	15,60	13,00	7,15	3,90
	D.C AGM 75-12	176,25	138,75	90,00	51,75	30,75	22,50	18,00	15,00	8,25	4,50
	D.C AGM 100-12	235,00	185,00	120,00	69,00	41,00	30,00	24,00	20,00	11,00	6,00
	D.C AGM 120-12	282,00	222,00	144,00	82,80	49,20	36,00	28,80	24,00	13,20	7,20
	D.C AGM 150-12	352,50	277,50	180,00	103,50	61,50	45,00	36,00	30,00	16,50	9,00
1,60	D.C AGM 17-12	40,80	32,30	21,25	11,90	7,14	5,27	4,25	3,57	1,96	1,12
	D.C AGM 26-12	62,40	49,40	32,50	18,20	10,92	8,06	6,50	5,46	2,99	1,72
	D.C AGM 42-12	100,80	79,80	52,50	29,40	17,64	13,02	10,50	8,82	4,83	2,77
	D.C AGM 65-12	156,00	123,50	81,25	45,50	27,30	20,15	16,25	13,65	7,48	4,29
	D.C AGM 75-12	180,00	142,50	93,75	52,50	31,50	23,25	18,75	15,75	8,63	4,95
	D.C AGM 100-12	240,00	190,00	125,00	70,00	42,00	31,00	25,00	21,00	11,50	6,60
	D.C AGM 120-12	288,00	228,00	150,00	84,00	50,40	37,20	30,00	25,20	13,80	7,92
	D.C AGM 150-12	360,00	285,00	187,50	105,00	63,00	46,50	37,50	31,50	17,25	9,90
D.C AGM 200-12	480,00	380,00	250,00	140,00	84,00	62,00	50,00	42,00	23,00	13,20	

Deep Cycle AGM

D.C AGM Series

CHARGING INSTRUCTIONS

A. Normal Recharge

Batteries to be recharged in CC-CV mode only.

CHARGING CHARACTERISTICS		
OPERATION MODE	VOLTAGE SETTING (12V, 20 - 30 °C)	CURRENT SETTING
FLOAT	13.7V +/- 0.1V	Maximum: 0.3 CA Minimum: 0.1 CA
CYCLIC	14.7V +/- 0.1V	

Temperature Compensation : (Reference 25°C)

Float : -18mV/°C for 12V unit

Cyclic : -30mV/°C for 12V unit

B. Fast Recharge

During operation, if the battery bank is subjected to regular (daily) deep discharge in excess of 50% (cumulative basis), the fast recharge option may be exercised. Fast recharge, following pattern to be followed:

Step 1 : 0.3C - 14.5V

Step 2 : 0.1C - 14.5V

Step 3 : 0.05C - 14.5V

Step 4 : 0.02C - 14.5V

Total duration for the four steps shall be 5.0 hours for a recharge after a 70% DOD. However, this mode of recharge will require an equalization once a month at the recommended float voltage for a period of 12 hours uninterrupted.

C. Cyclic Use

1. Maintain a constant voltage charge at a voltage of 2.45 V/cell (25°C). When charging at an ambient temperature of 5°C or below or 35°C or above, it is necessary to adjust the charge voltage in relation with the temperature. The temperature coefficient should be -5mV/°C/cell.
2. The maximum charge current should be 0.3CA or less.
3. To avoid overcharging on completion of charge, we recommend charging to be stopped or the constant voltage to be reduced to 2.275V/cell (25°C).
4. We also recommend charging the battery at an ambient temperature between 5 to 35°C to prevent any adverse effects on its effective life.
5. In case the battery has to be discharged deeply and frequently during use, to avoid poor charging, we recommend the charging time to be extended to as much as 1.5 to 2 times that of usual charging, once every five cycles of discharge & recharge.
6. If higher than recommended/faster charge is required, please consult us.

BATTERY BANKS

In order to increase Battery Storage capacity, paralleling of Battery Strings is permitted under following conditions :

- Paralleling of a maximum of three strings is allowed provided they are all of the same brand, same

Headquarters: Scholiou 6, Ionia 570 08

Warehouse: C Phase, Industrial Zone Thessaloniki-Sindos

Office: Pefkon 147 & Elaion, Neo Irakleio 141 22

Retail Shop: I.Dragoumi 40, Ionia 570 08

T.: 0030 2310 785722

T.: 0030 2310 570203

T.: 0030 210 2819001

T.: 0030 2310 788506

F.: 0030 2310 760882

F.: 0030 2310 788507

F.: 0030 2310 788507

E.: info@unibat-sa.gr

E.: info@unibat.gr

E.: info@unibat.gr

E.: info@unibat.gr

W.: www.unibat-sa.gr

W.: www.unibat-sa.gr

W.: www.unibat-sa.gr

W.: www.unibat-sa.gr

Deep Cycle AGM

D.C AGM Series

age and Ah capacity.

- Adequate care shall be taken in ensuring that all inter-unit connecting cables have equal length and cross-section. All system cables from each of the strings, shall also be of same length and cross - section.
- Total charging current in the case of parallel strings, to be taken care of so that each of the strings get the recommended level of Amperes - minimum 10% and maximum 30% of the rated C20 capacity of each of the 12V blocks.


For inter-block connection flexible copper cable with suitable lugs are recommended. Cable cross section may be estimated at 2.8 Amps/mm² at the maximum anticipated discharge load.

Even though **UNIBAT Deep Cycle AGM** batteries are designed to perform anywhere between -20 to +50°C, for optimum battery life avoid prolonged operation in ambient in excess of 35°C.


Above 25°C, for every 8°C rise of weighted average operating temperature, battery life is reduced by 50%.

PERFORMANCE CURVES


DISCHARGING CURVES

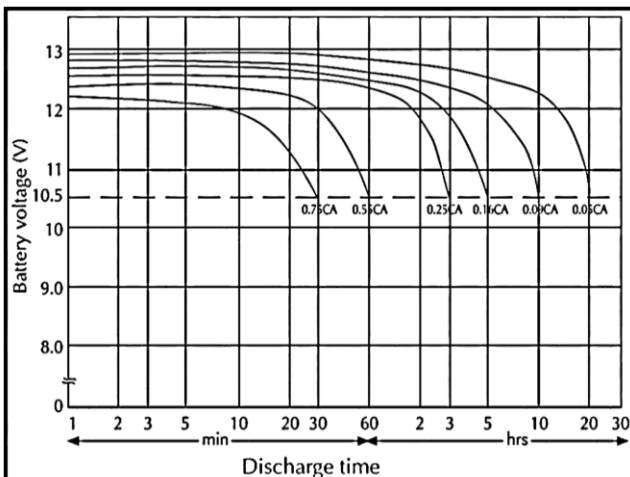


CHARGING CURVES

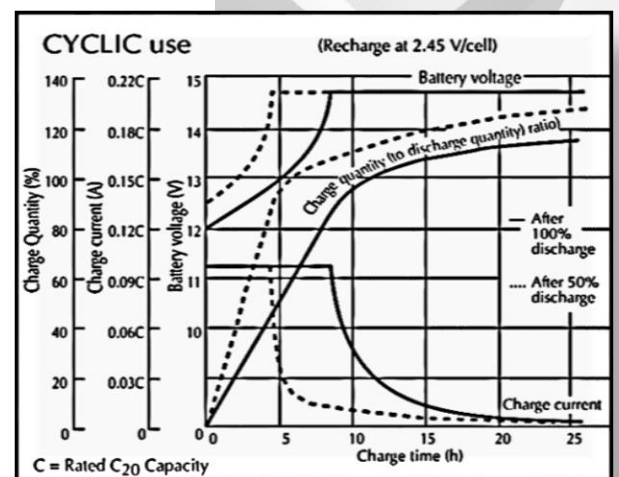

CAPACITY RETENTION

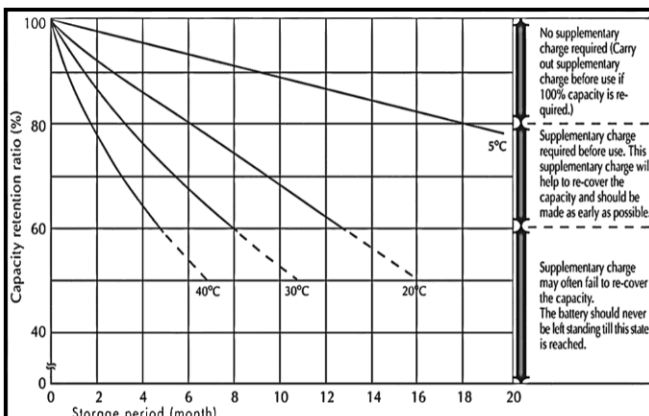

CYCLES vs D.O.D

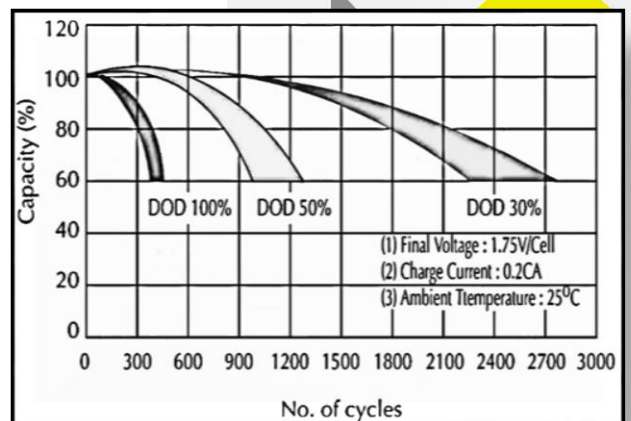

Deep Cycle AGM

D.C AGM Series

DIMENSIONS – TERMINALS

